




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

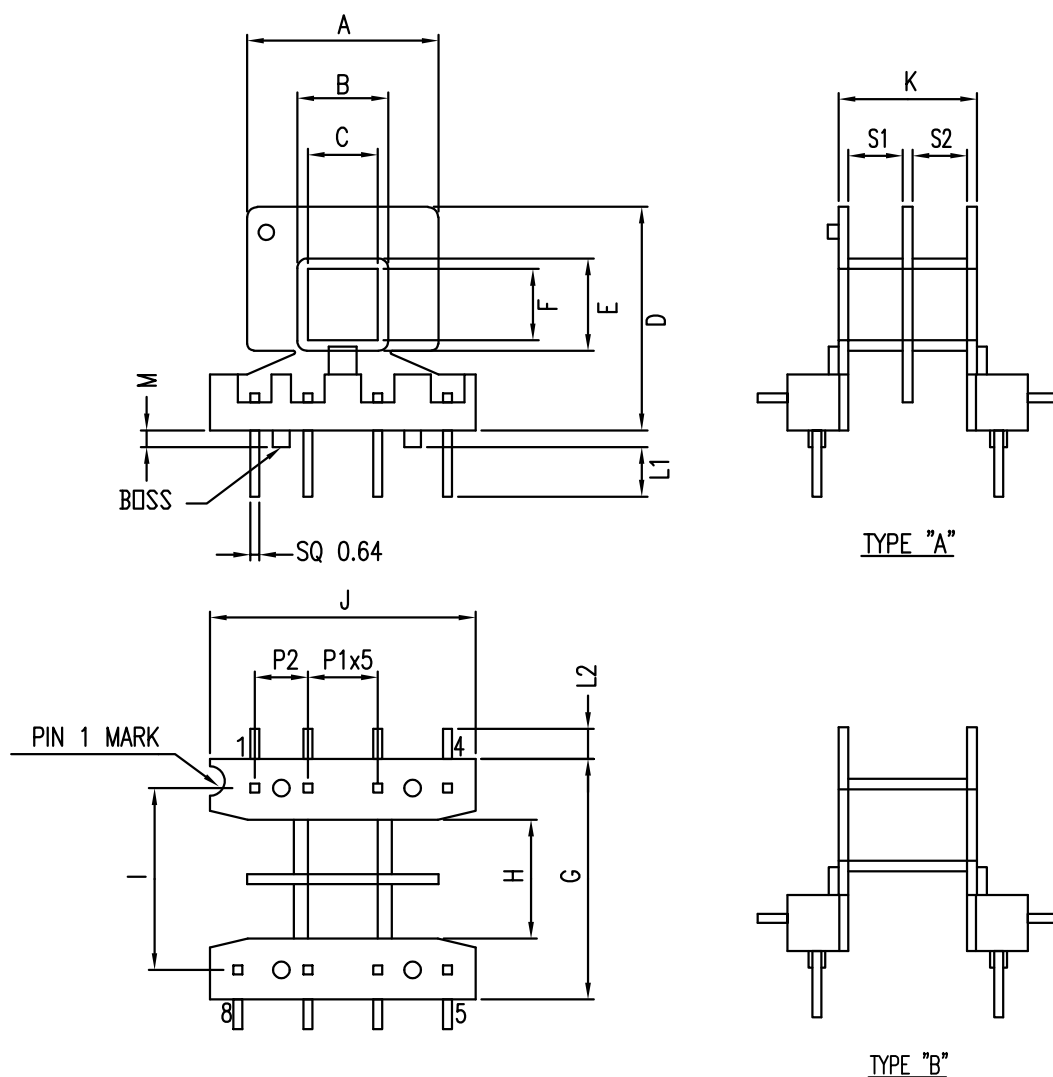

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	M ±0.2	P1 ±0.2	P2 ±0.2	S1	S2	TYPE
EI-19-5.1-2-8PIN (0601904)	13.6	7.0	5.1	15.9	6.9	5.1	17.1	8.4	13.0	19.0	9.9	3.1	2.0	0.95	5.0	3.8			B
EI-19-5.1-3-8PIN (0601905)	13.6	7.0	5.1	15.9	6.9	5.1	17.1	8.4	13.0	19.0	9.9	3.1	2.0	0.95	5.0	3.8	3.7	3.9	A
EI-19-5.1-2-8PIN (0601906)	13.6	6.6	5.1	15.6	7.3	5.1	17.2	9.2	12.8	18.9	10.9	3.1	2.0	0.95	5.0	3.8			B
EI-19-5.1-2-8PIN (0601906-1)	13.6	6.6	5.1	15.6	7.3	5.1	17.2	9.2	12.8	18.9	10.9	3.1	2.0		5.0	3.8			B

DATE	REVISED STORY	MODEL : EI-19-5.1-2-8PIN (TPI NO.:0601904) EI-19-5.1-3-8PIN (TPI NO.:0601905) EI-19-5.1-2-8PIN (TPI NO.:0601906) EI-19-5.1-2-8PIN No Boss (TPI NO.:0601906-1)
6/01'02	RELEASED THE NEW DRAWING SPEC.	
11/18'20	Add PN 0601906-1	BOBBIN MATERIAL : Nylon 66/GF UL94HB ; PBT/GF UL94V-0 PIN MATERIAL : CP WIRE (TIN PLATED)
		DATE : NOV 19,2020 REV. : B TOLERANCE : .xxx±0.08 .xx ±0.1 x ±0.2