

Addressable Manual Call Point

FMS-CP1-R


General

The **FMS-CP1R** addressable manual call point connect to addressable fire alarm control panel. Up to 256 devices can be connected to each loop of FAS-R fire alarm control panel. The device has an integral alarm indicator that illuminate when the manual call point has been pushed down



Features

- ◆DCP protocol for fast and robust communication
- ◆Use standard cable, no shielded or twisted pair required on SLC loop
- ◆Up to 256 devices can be used on per loop
- ◆LED indicator can show normal 、alarm and failure status
- ◆Up to 256 devices can be used on per loop
- ◆With emergence telephone jack
- ◆Address is easily to set by DIP switch

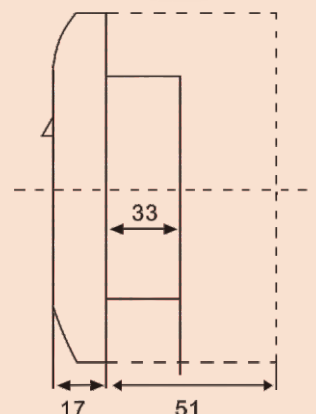

Specifications

Model	FMS-CP1R
Operating Voltage	DC18V~30V
Quiescent current	≤ 0.5mA
Alarm current	18mA (max) @ DC 24V
LED indications	Normal: flash one time per 6 seconds; Alarm: always on; Failure: flash two times per 6 seconds
Operating temperature	-10°C~50°C
Relative humidity	<95% RH, non-condensing
Material / color	Fire-proof plastics / Red
Dimensions	Φ140 x 50 mm

