




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

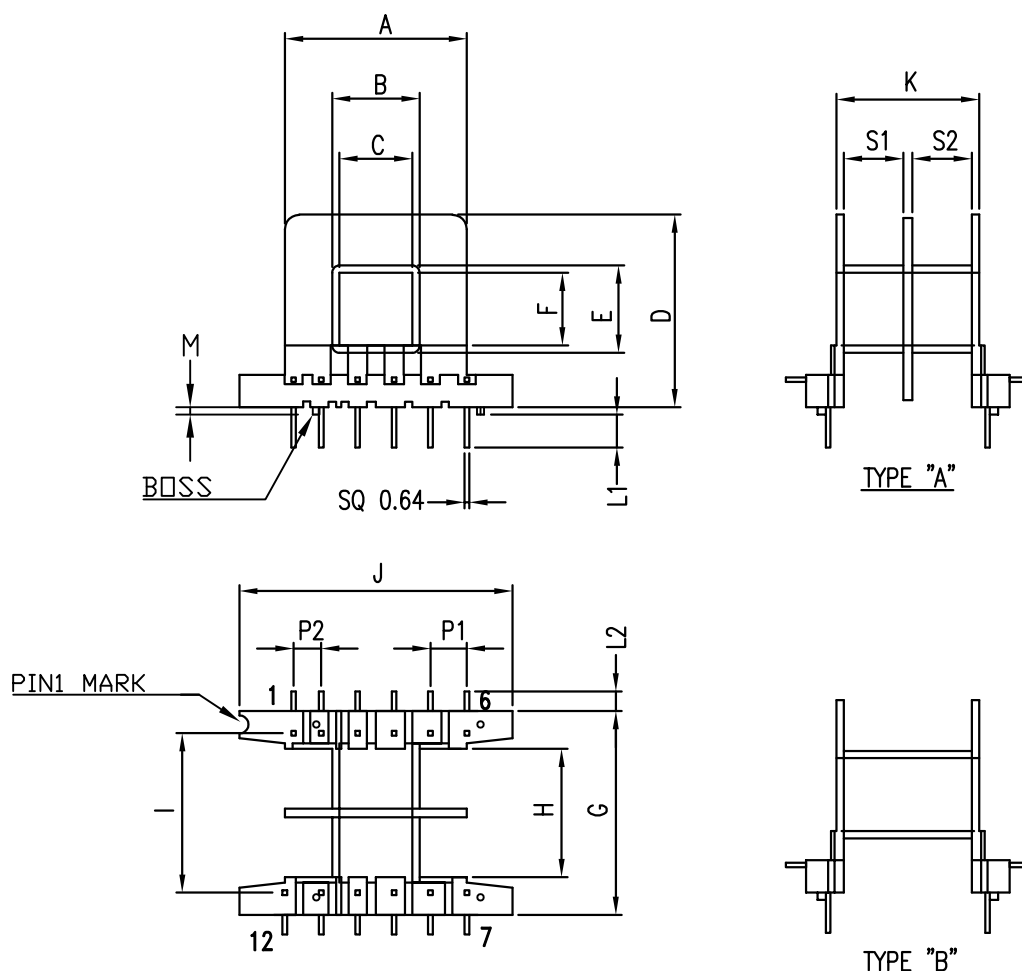

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.5	L2 ±0.3	M ±0.2	P1 ±0.2	P2 ±0.2	S1 ±0.2	S2 ±0.2	TYPE
EI 35-10-3-12PIN (0603504)	24.6	12.2	10.0	26.7	12.2	10.1	27.0	16.6	22.0	37.3	18.5	3.5	3.0	1.0	5.0	3.8	7.5	7.5	A
EI 35-10-2-12PIN (0603505)	24.8	12.4	10.0	26.5	12.2	10.1	27.0	16.6	21.9	37.5	18.6	3.4	3.0	1.0	5.0	3.8			B
EI 35-13.2-2-12PIN (0603506)	24.8	12.4	10.2	29.2	15.4	13.2	27.0	16.6	21.8	37.4	18.5	3.4	3.0	1.0	5.1	3.8			B
EI 35-13.2-3-12PIN (0603507)	24.8	12.4	10.2	29.3	15.4	13.2	27.0	16.6	21.8	37.5	18.6	3.4	3.0	1.0	5.1	3.8	8.0	8.0	A

DATE	REVISED STORY	MODEL :	BOBBIN MATERIAL :	PIN MATERIAL :	DATE :	REV.:	TOLERANCE :
6/01'02	RELEASED THE NEW DRAWING SPEC.	EI-35-10-3-12PIN (TPI NO.:0603504) EI-35-10-2-12PIN (TPI NO.:0603505) EI-35-13.2-2-12PIN (TPI NO.:0603506) EI-35-13.2-3-12PIN (TPI NO.:0603507)	Nylon 66/GF UL94HB PBT/GF; PET/GF UL94V-0	CP WIRE (TIN PLATED)	June 01,2002	A	.XXX±0.08 .XX ±0.1 .X ±0.2