

Addressable Heat Detector

FMS-FT-R

General


The **FMS-FT-R** addressable heat detector are microprocessor controlled addressable detector suitable for connection to the FMS-R addressable fire alarm control panel. Up to 256 detectors can be connected to each loop.

The sensitive part of device is enclosed to prevent being moistened and contaminated.



Features

- ◆DCP protocol for fast and robust communication
- ◆Use standard cable, no shielded or twisted pair required on SLC loop
- ◆Up to 256 devices can be used on per loop
- ◆Dual LED indicators can show normal 、alarm and failure status
- ◆Self-restoring ensures the elements repeated use
- ◆Pure silver contacts ensure the quick response
- ◆Address is easily to set by DIP switch
- ◆Magnet-initiated alarm test function

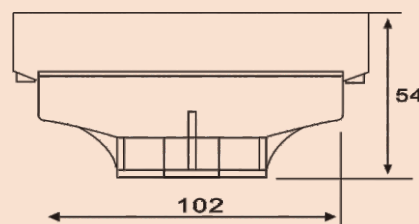

Specifications

Model	FMS-FT-R
Operating Voltage	DC18V~30V
Quiescent current	≤ 0.5mA
Alarm current	18mA (max) @ DC 24V
Alarm temperature	70°C
LED indications	Normal: flash one time per 6 seconds; Alarm: always on; Failure: flash two times per 6 seconds
Operating temperature	-10°C~50°C
Relative humidity	<95% RH, non-condensing
Material / color	Fire-proof plastics / White
Dimensions	Φ102 x 54 mm

