


Fixed Temperature Heat Detector

FMD-WK100L

Advantages

- ◆Stabilized performance, long-term durability and least-malfunction are ensured by employing a UL approved sensor
- ◆The sensitive part is enclosed to prevent from being moistened and contaminated
- ◆Self-restoring function ensures the elements repeatedly use

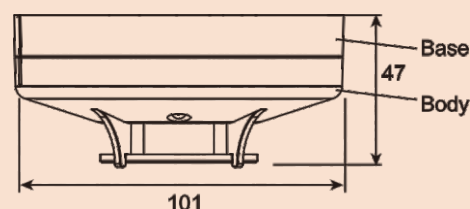

Specifications

Model	FMD-WK100L	Ambient Temp	-10°C~+55°
Type	2-wire	Ambient Humidity	0~95%
Voltage Range	12V~30V DC	Material	Fire-Proof plastics
Alarm Current	24V DC 30mA	Dimensions	101 (Dia.) x 47 (H) mm
Polarization	Non-polarized	Weight	100g
Alarm Temp	Comply to En54, CNS	Color	White

Effective Alert Area

Height/Construction	UNDER 4 M	4M~8M
Fire-Proof Building	60M ²	30M ²
Ordinary Building	30M ²	15M ²

