




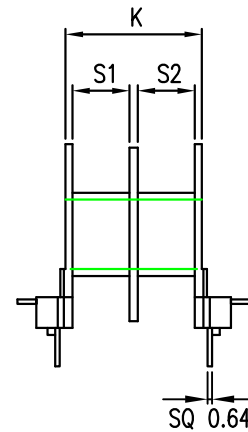


台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

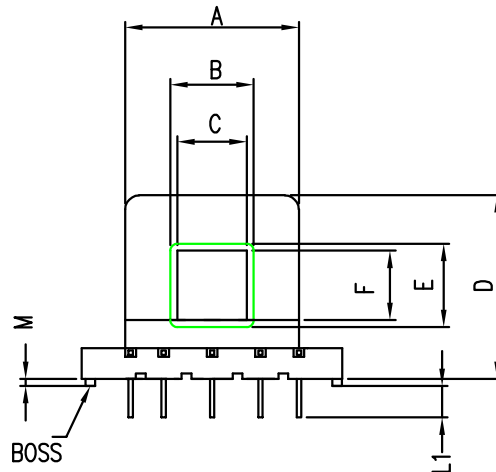

TYPE "A"

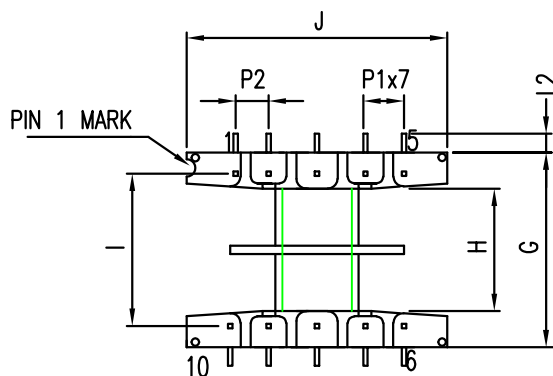

TYPE "B"

UNIT : mm

MODEL (TPI NO.)	A ±0.2	B ±0.2	C ±0.2	D ±0.2	E ±0.2	F ±0.2	G ±0.2	H ±0.2	I ±0.3	J ±0.2	K ±0.2	L1 ±0.3	L2 ±0.3	M ±0.2	P1 ±0.2	P2 ±0.2	S1 ±0.1	S2 ±0.1	TYPE
EI-25-7-3-10PIN (0602503)	18.2	9.0	7.1	23.4	9.1	7.1	18.7	10.0	15.5	26.2	12.4	3.8	3.2	1.2	5.0	4.3	4.0	4.0	A
EI-25-13-2-10PIN (0602505)	18.3	9.3	7.3	28.0	15.0	13.1	19.0	9.4	15.7	26.5	12.4	3.3	3.2	1.7	5.0	3.5			B

DATE	REVISED STORY	MODEL :		
		EI-25-7-3-10PIN (TPI NO.:0602503)		
		EI-25-13-2-10PIN (TPI NO.:0602505)		
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL :	Nylon 66/GF UL94HB	
			PET/GF UL94V-0	
		PIN MATERIAL :	CP WIRE (TIN PLATED)	
		DATE :	REV.:	TOLERANCE :
		MAY 03,2007	A	.XXX±0.08 .XX ±0.1 .X ±0.2