

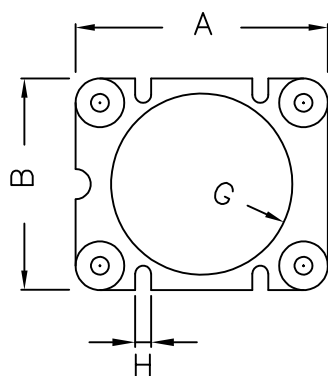



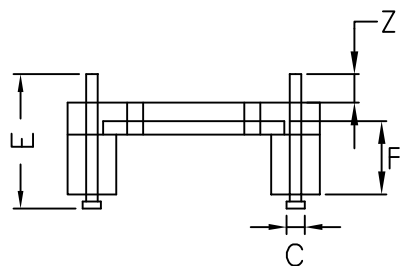

BOTTOM



FOOT

UNIT: mm

| MODEL<br>(TPI NO.)     | A<br>±0.2 | B<br>±0.2 | C<br>±0.2 | D<br>±0.2 | E<br>±0.2 | F<br>±0.2 | G<br>±0.2 | H<br>±0.2 | W<br>±0.2 | X<br>±0.2 | Y<br>±0.2 | Z<br>±0.2 |
|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| STM302-04<br>(STM0006) | 10.0      | 8.6       | ø1.0      | 5.0       | 6.2       | 3.0       | ø6.8      | 0.5       | ø0.8      | 7.7       | 6.1       | 0.85~1.0  |
| STM502-04<br>(STM0008) | 15.8      | 13.2      | ø1.4      | 6.8       | 7.7       | 4.5       | ø11.3     | 1.25      | ø1.2      | 12.7      | 10.3      | 0.85~1.0  |

| DATE    | REVISED STORY                  | MODEL :<br>STM SERIES - 2             |             |                               |
|---------|--------------------------------|---------------------------------------|-------------|-------------------------------|
| 6/01'02 | RELEASED THE NEW DRAWING SPEC. | BOBBIN MATERIAL : Nylon 46/GF UL94V-0 |             |                               |
| 8/01'20 | Addition SPEC "Z"              | PIN MATERIAL : CP WIRE (TIN PLATED)   |             |                               |
|         |                                | DATE :<br>Aug 01,2002                 | REV. :<br>B | TOLERANCE : .xxx<br>.xx<br>.x |