




台灣高分子工業股份有限公司
TAIWAN POLYMER INDUSTRIAL CO., LTD.

PRODUCT SPEC.

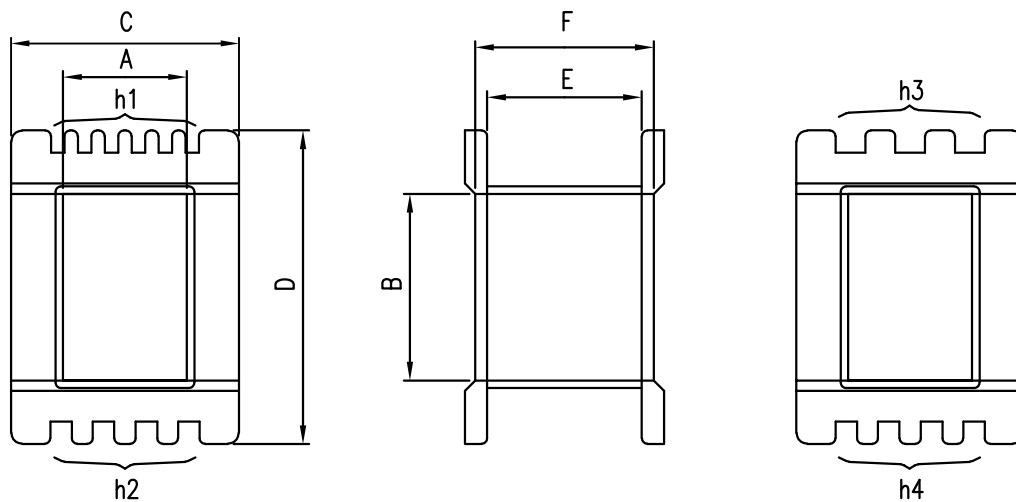

UNIT : mm

MODEL	(TPI NO.)	A ±0.3	B ±0.3	C ±0.3	D ±0.3	E ±0.3	F ±0.3	h1	h2	h3	h4
EI 57-10	(0105701)	19.6	10.4	37.5	32.0	26.3	28.3	5	5		
EI 57-19	(0105702)	19.7	19.7	36.5	36.4	25.6	27.9	7	7	7	7
EI 57-23	(0105704)	19.6	23.1	37.0	43.9	25.1	27.9				5
EI 57-28	(0105705)	19.4	28.1	37.0	49.0	25.0	28.4				5
EI 66-10	(0106601)	22.5	10.7	43.4	26.7	30.2	32.9	6		6	
EI 66-25	(0106602)	22.8	25.8	43.1	50.3	30.0	32.8	5	5	5	5
EI 66-35.5	(0106604)	22.6	35.5	43.2	55.2	29.4	32.7				5
EI 66-30	(0106605)	22.8	30.6	43.9	56.8	29.9	32.8	5	5	5	5
EI 76-25	(0107601)	26.6	25.2	49.3	54.8	34.2	36.9	9	9		
EI 76-40	(0107603)	26.1	40.4	49.8	70.2	33.9	37.2	8			
EI 86-40	(0108601)	29.4	40.0	55.9	68.3	39.1	42.5	5			
EI 86-45	(0108602)	29.6	45.2	55.6	77.5	38.4	41.5	6	6		

DATE	REVISED STORY	MODEL : EI 57 ~ EI 86 (ONE SEC SERIES)	
6/01'02	RELEASED THE NEW DRAWING SPEC.	BOBBIN MATERIAL : PET/GF ; PBT/GF UL94V-0 Nylon 66 UL94V-2 ; Nylon 66/GF UL94HB	
		DATE : March 20,2007	REV.: A
		TOLERANCE :	.XXX±0.08 .XX ±0.1 .X ±0.2