


Photoelectric Type Smoke Detector with Duo-LEDs

FMS-WT33L

Advantages

- ◆Dual LEDs for 360-degree visibility. Bi-color LEDs,stand-by status: Green; Alarm status: Red
- ◆With the photoelectric sensing principle, this kind of detector is activated more quickly, accurately and reliably, and there are no false alarm due to chemicals, exhaust gas, wind and exterior light
- ◆Detector has passed EMC test, which greatly eliminates false alarms caused by interference from nearby sources
- ◆Pretty and jointless outward

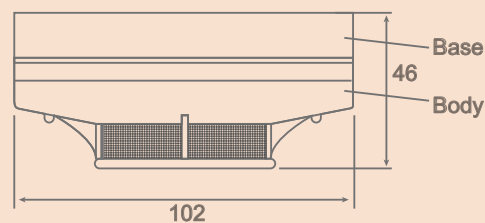

Specifications

Model	FMS-WT33L	Sensitivity Setting	Comply to En54, CNS
Type	2-wire	Ambient Temp	-10°C~+55°
Voltage Range	12V~30V DC	Ambient Humidity	0~95%
Alarm Current	24V DC 30mA	Material	Burning-Proof plastics
		Dimensions	102(Dia.) x 46(H)mm
Standby Current	24V DC/25 µA Below	Weight	131g
Polarization	Non-polarized	Color	White

