


Residential Photoelectric Smoke Detector

FMD-RD998

Advantages

- ◆ Quickly detect the slow combustion and the fire source of the smolder
- ◆ When battery is low, alarm signal will be sent (buzz once per 40 sec.). Meanwhile, it can normally prelate 30 days
- ◆ Three-year warranty (not including battery)

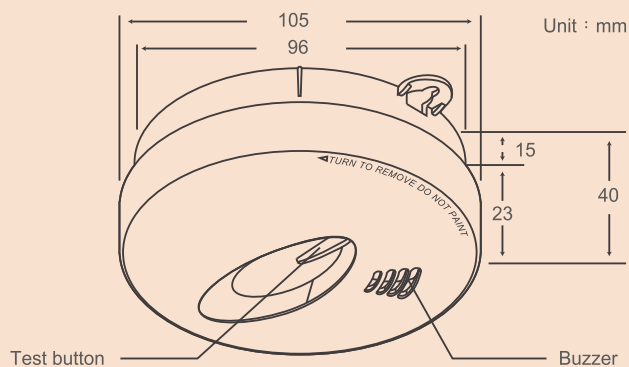

Specifications

Model	FMD-RD998	Ambient Temp	-10°C~+55°
Type	Stand alone type	Material	Fire-Proof plastics
Voltage Range	9V DC Battery	Dimensions	105(Dia.) X 40(H)mm
Alarm Current	9V DC 10mA	Weight	Approx. 146g
Sound Output	85 dB/ M and above	Color	White
Sensitivity Setting	Comply to En54	Accessories	9V Battery; Uetgy u; I genqu; Uggro chn; J qqnu
Indicator	Standby: flash every 40 seconds Alarm: flash and beep continuously Battery low: beeps and flash every 40 seconds		

